


ACE POWER

Model:TS-ACE-R01-58B

5000K CCT 84 LED 1.6"X22" foot light engine

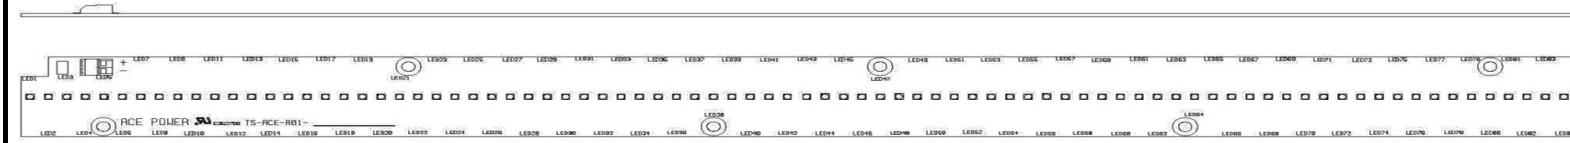

Features

Light output > 4000lm , high lighting efficacy

UL recognized component, E352708

Matched LED driver (IP100-36C3D) is available

The spacing of our highly efficient Nichia LEDs are optimized both for hot-spot free and thermally robust designs

USE for troffer retrofit application

Can be driven at higher current level to get close to 5000lm flux level for high bay application

Warranty: 5 Years

Performance Rating

Description	1.6" by 22" pre-wired light engine					Units
Number of LEDs	84					-
CCT	5000					K
Input Current	455	700	840	945	1050	mA
Operating Voltage	34.08	35.28	36	36.48	36.96	Volts
Total Power	15.51	24.70	30.24	34.47	38.81	Watts
Total Flux	2357	3482	4082	4551	4967	Lumens
Lighting efficacy	152	141	135	132	128	lm/W
CRI	83 typical					-

MECHANICAL DIMENSION

