


ACE POWER

Model:TS-ACE-R02-58B

5000K CCT 84 LED two 2 foot board kit

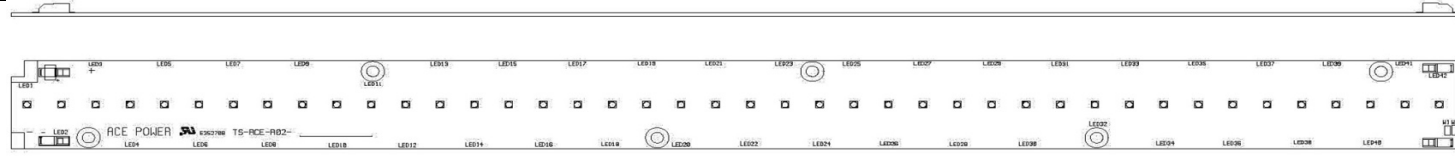

Retrofit kit features

Light output was designed to match application flux DLC requirement for 2' by 2' troffer or 2' by 4' troffer

UL recognized component, E352708

Matched LED driver (TD40-36C2D) is available

The spacing of our highly efficient Nichia LEDs are optimized both for hot-spot free and thermally robust designs

USE one kit for 2X2 (or 1X4) troffer, use 2 kits for 2X4 troffer retrofit application

Can be driven at higher current level to get flux level for high bay application

Performance Rating

Parameter	two 1.6" by 22" pre-wired board				Units
Number of LEDs	42 each board total 84				-
CCT	5000				K
Input Current	455	700	945	1050	mA
Operating Voltage	34.08	35.28	36.48	36.96	Volts
Total Power	15.51	24.70	34.47	38.81	Watts
Total Flux	2357	3482	4551	4967	Lumens
Lighting efficacy	152	141	132	128	lm/W
CRI	83 typical				-

MECHANICAL DIMENSION

